

DIGITUS® CAT 6A U/UTP installation cable, 500 m, simplex, Eca

DK-1613-A-VH-5

EAN 4016032344209



CAT 6A U-UTP installation cable, 500 MHz Eca (EN 50575), AWG 23/1, 500 m drum, sx, blue

The Digitus Cat 6A U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-11-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,2 mm (Cca); 1,4 mm (B2ca)
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C

- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7,1 mm (Eca); 7,3 mm (Dca); 7,4 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 53 kg (Eca); 54 kg (Dca); 55 kg (Cca); 56 kg (B2ca)
- Electrical properties:
- Impedance: 100±50Ω @ 1 - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC loop resistance: 147 Ωm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%







Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6A
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 500 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	27.60	50.00	50.00	22.00	55,000.00
Packaging Unit Inside	1	27.60	50.00	50.00	22.00	55,000.00
Packaging Unit Single	1	27.60	50.00	50.00	22.00	55,000.00
Net single without Packaging	1	27.44	50.00	50.00	22.00	55,000.00

More images:

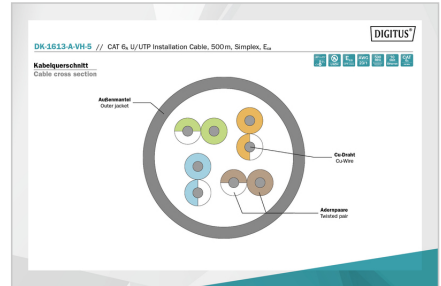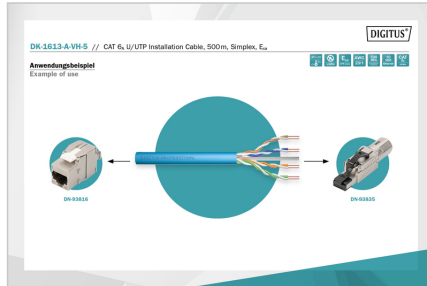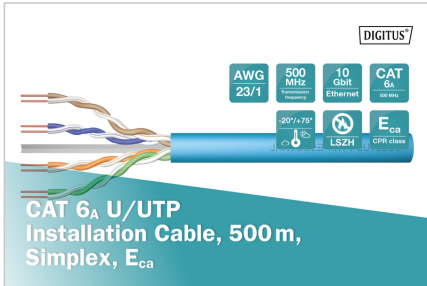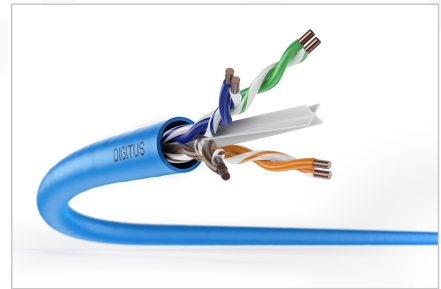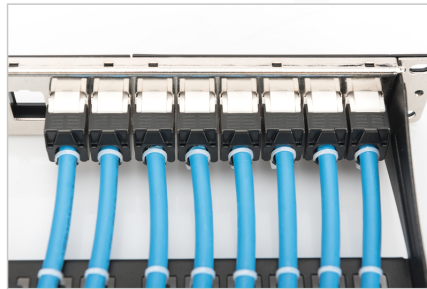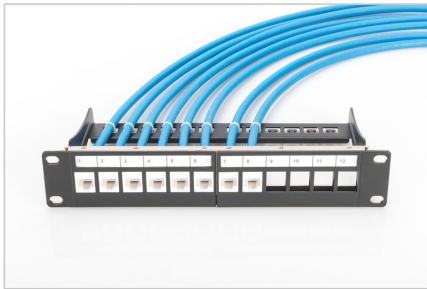


Produktdaten Product Information		Physikalische Spezifikationen Physical Properties	
Produktname Product Name	DK.1613-A-VH-S	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH
Produkttyp Product Type	Installation Cable	Material Material	LSZH

Leistungseigenschaften Performance Properties		Leistungseigenschaften Performance Properties	
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value

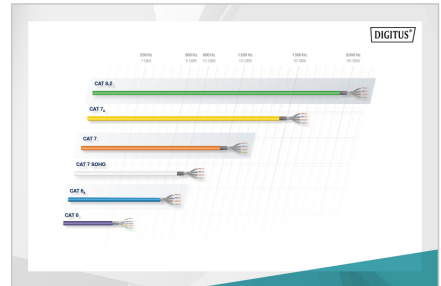

Zusätzliche Eigenschaften Additional Properties		Zusätzliche Eigenschaften Additional Properties	
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value
Parameter	Value	Parameter	Value

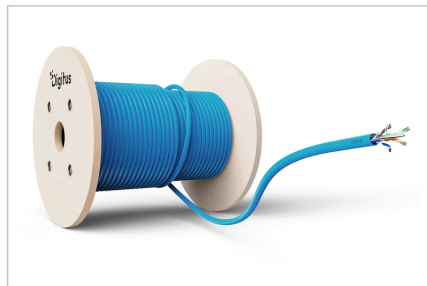

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com