

www.opledtw.com

Opto Plus LED Corp.
0.56" SMD Type LED Display
OPS-S56AAF5

● **EDIT HISTORY**

Version A: FEB. 17, 2025

Preliminary Spec.

Confidential Document



Opto Plus LED Corp. 0.56" SMD Type LED Display OPS-S56AAF5

● FEATURES

- 0.56 inch (14.20 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

● DESCRIPTION

The device are 0.56 inch (14.20 mm) height single digit 7-segment displays,
Built-in programmable LEDs.

This device are 256-step gray-scale output to allow 16,777,216 color display,
Built-in oscillator 20M.

The device is Opto Plus LED Corp standard LED Display.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

PART NO.		DESCRIPTION
	OPS-S56AAF5-GW	Single data line Gray face White segment
	OPS-S56AAF5-BW	Single data line Black face White segment


RoHS Compliance



Pb Free.




● **MECHANICAL DIMENSIONS**

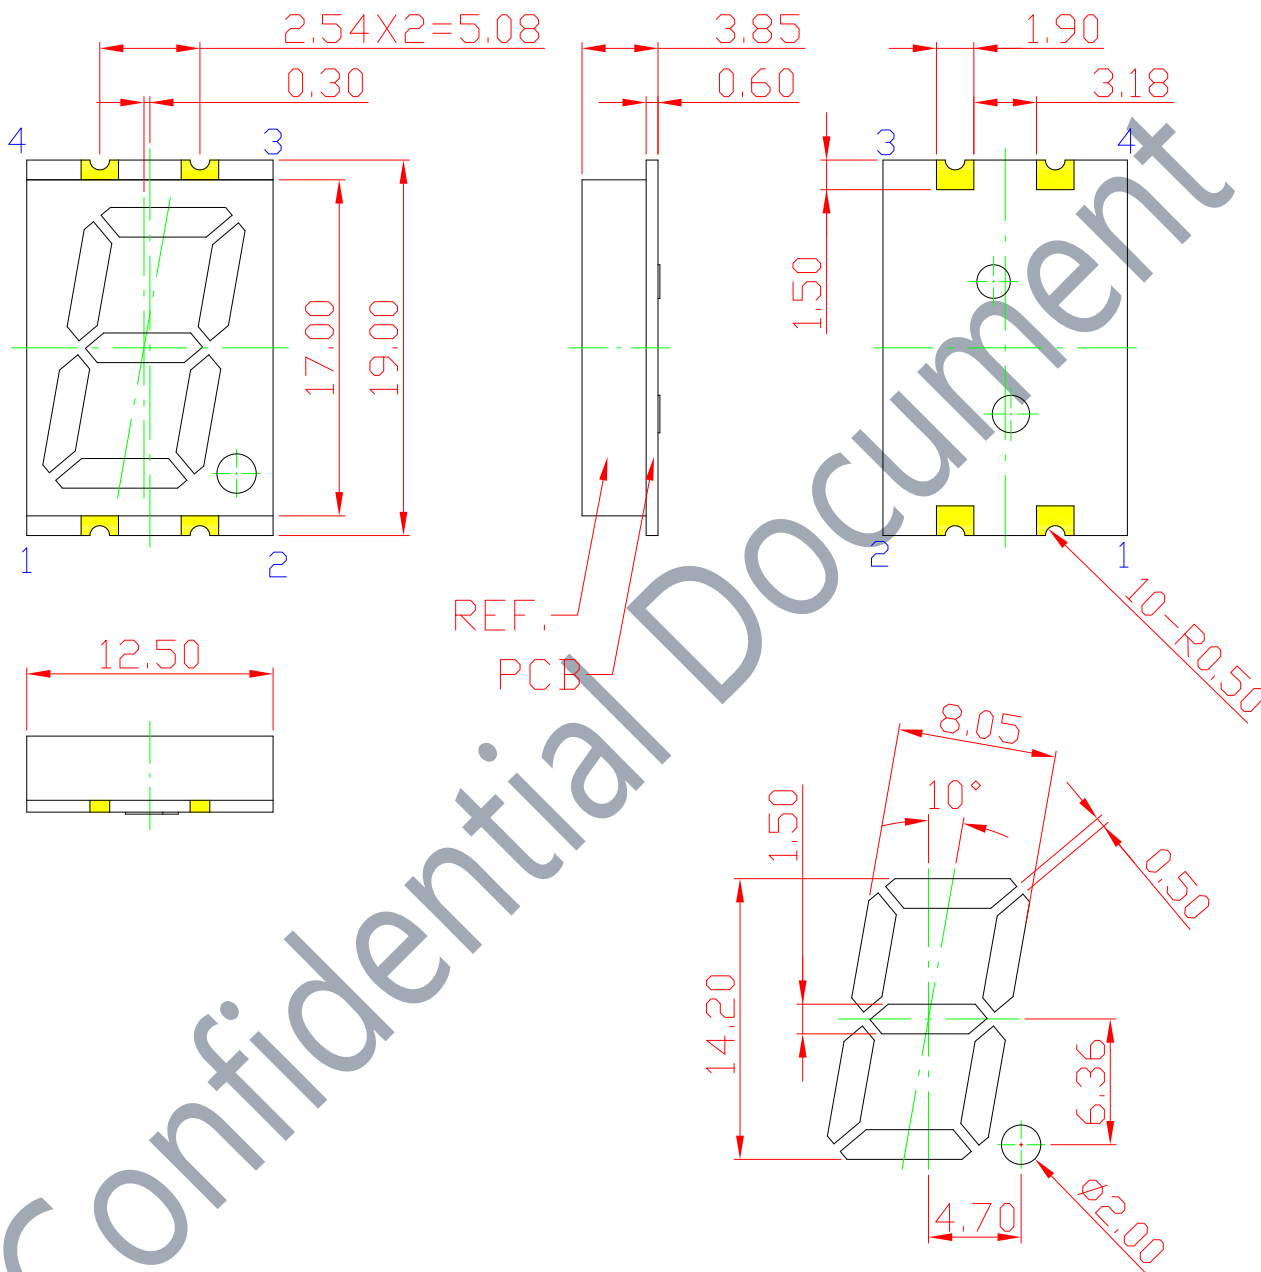

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

TYPICAL INTERNAL EQUIVALENT CIRCUIT

Recommended Soldering Pattern

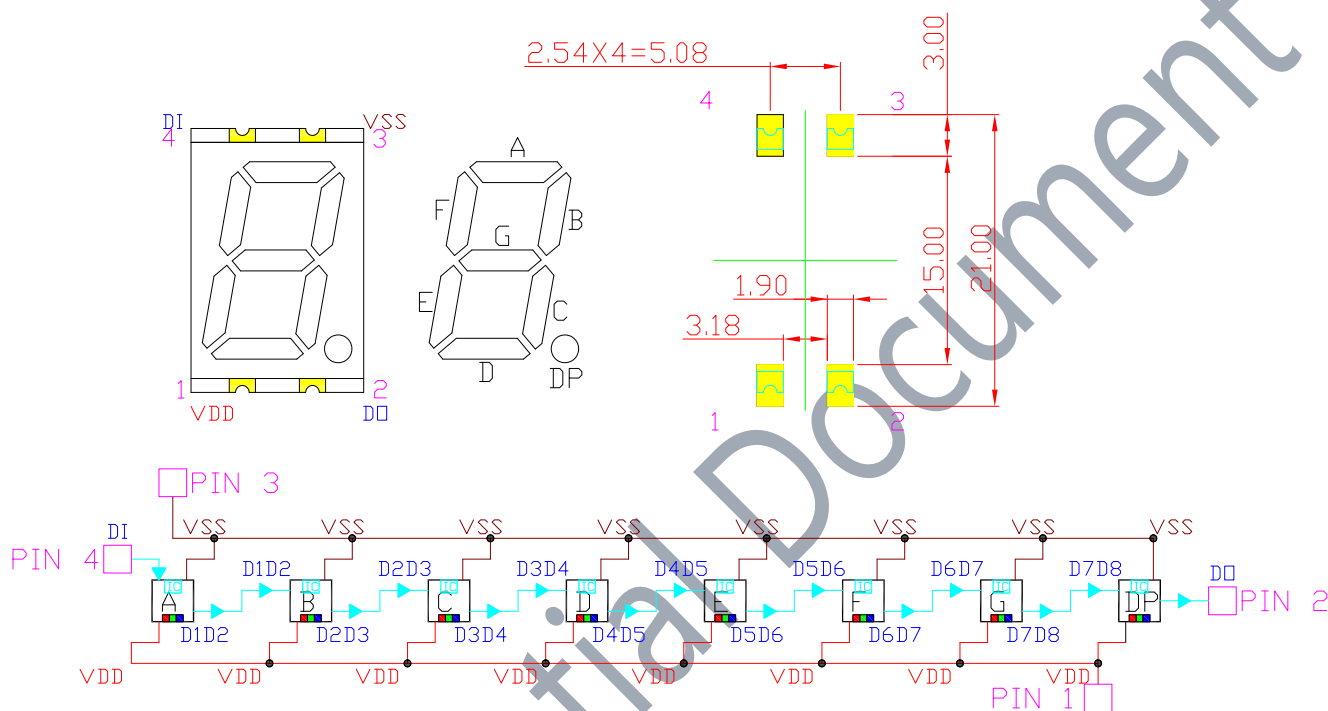

PIN 1 : Power Supply.

PIN 2 : Control Data Signal Output.

PIN 3 : Ground.

PIN 4 : Control Data Signal Input.

※EMITTED COLOR : RED & GREEN & BLUE

IN THE PRACTICAL APPLICATION CIRCUIT, THE SIGNAL INPUT AND OUTPUT PINS OF THE IC SIGNAL INPUT AND OUTPUT PINS SHOULD BE CONNECTED TO THE SIGNAL INPUT AND OUTPUT TERMINALS. IN ADDITION, IN ORDER TO MAKE THE IC CHIP IS MORE STABLE, EVEN THE CAPACITANCE BETWEEN DISPLAY IS ESSENTIAL BACK; APPLICATION: DISPLAY TRANSMISSION DISTANCE IS SHORT, SUGGESTED IN SIGNAL IN TIME THE CLOCK LINE INPUT AND OUTPUT END OF EACH CONNECTED IN SERIES PROTECTION RESISTOR (ABOUT 470 OHMS). APPLICATION: FOR MODULE OR GENERAL SPECIAL-SHAPED PRODUCTS, DISPLAY TRANSMISSION DISTANCE IS LONG, BECAUSE OF DIFFERENT WIRE AND TRANSMISSION DISTANCE, IN THE SIGNAL IN TIME CLOCK AT BOTH ENDS OF THE LINE ON GROUNDING PROTECTION RESISTANCE WILL BE SLIGHTLY DIFFERENT;

TO THE ACTUAL USE OF FIXED;

Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice



Opto Plus LED Corp. 0.56" SMD Type LED Display OPS-S56AAF5

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-S56AAF5-GW	Single data line Gray face White segment
OPS-S56AAF5-BW	Single data line Black face White segment



Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S56AAF5

● F5: FULL COLOR (AlInGaP/InGaP)

ABSOLUTE MAXIMUM RATING AT Ta=25°

Parameter	Symbol	Maximum Rating	Unit
Supply Voltage	VDD	6.5	V
Power Dissipation	PD	<400	mW
Maximum Output Current	I _{LEDOUT}	5	mA
Operating temperature	T _{OP}	-25 to + 85	°C
Storage temperature	T _{ST}	-40 to + 100	°C
Welding temperature	T _M	300(<8sec.)	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C (Each. Segment)

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Dominant Wavelength (Red) (Each. Segment)	λ_D	I _{SINK} =5mA	-	622	-	nm
Dominant Wavelength (Green) (Each. Segment)	λ_D	I _{SINK} =5mA	-	524	-	nm
Dominant Wavelength (Blue) (Each. Segment)	λ_D	I _{SINK} =5mA	-	465	-	nm
Luminous Intensity (Red) (Each. Segment)	I _V	I _{SINK} =5mA	-	25	-	mcd
Luminous Intensity (Green) (Each. Segment)	I _V	I _{SINK} =5mA	-	60	-	mcd
Luminous Intensity (Blue) (Each. Segment)	I _V	I _{SINK} =5mA	-	15	-	mcd
Spectrum Radiation Bandwidth (Red) (Each. Segment)	$\Delta\lambda$	I _{SINK} =5mA	-	18	-	nm
Spectrum Radiation Bandwidth (Green) (Each. Segment)	$\Delta\lambda$	I _{SINK} =5mA	-	29	-	nm
Spectrum Radiation Bandwidth (Blue) (Each. Segment)	$\Delta\lambda$	I _{SINK} =5mA	-	20	-	nm




Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S56AAF5

ELECTRICAL - OPTICAL CHARACTERISTICS AT TA=25°C (DRIVER IC.)

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Note.
Supply Voltage	VDD	3.3	5.0	5.5	V	
Operation Current (With IC)	IDD-1	0.4	0.6	0.8	mA	R, G, B no load@VDD=5V
Operation Current (With IC)	IDD-2		0.4		mA	R, G, B no load@VDD=3.3V
Input High "H" of DI	VIH	1.98		VDD	V	
Input Low "L" of DI	VIL	0		1.0	V	
Output High "H" of DO	VOH	2.8			V	I _{OH} =4mA
Output Low "L" of DO	VOL			0.4	V	I _{OL} =4mA
R, G, B Sink Current	I _{Sink}	4.75	5.00	5.25	mA	Vo=VDD-3.0V @VDD=5V
Sleep Mode Current	I _{sleep}		1	5	uA	
Input leakage	I _{leak}			1	uA	DI=VDD
R, G, B off leakage current	I _{off}			1	uA	PWM=0(off), @R, G, B =5V
Propagation delay time	tPLZ			80	ns	DI → DO, CL=30pF
Propagation delay time	tPZL			80	ns	
Rising time	tTHL		15		ns	
Falling time	tTLH		15		ns	
Rising time	tR		80		ns	I _{Sink} (R/G/B) =5mA, CL=30pF
Falling time	tF		80		ns	
Data rate	F _{data}		800		KHz	

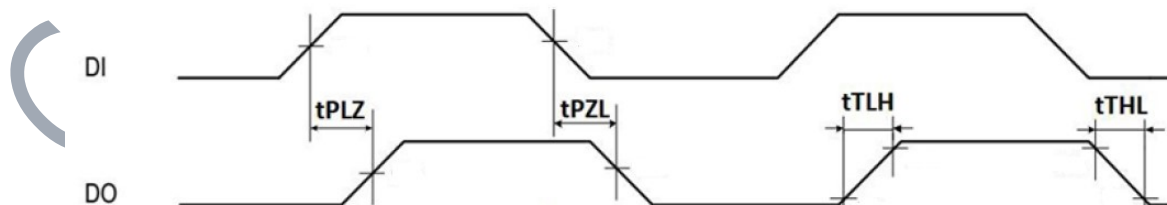




Opto Plus LED Corp.

0.56" SMD Type LED Display


OPS-S56AAF5

Data Transfer Protocol

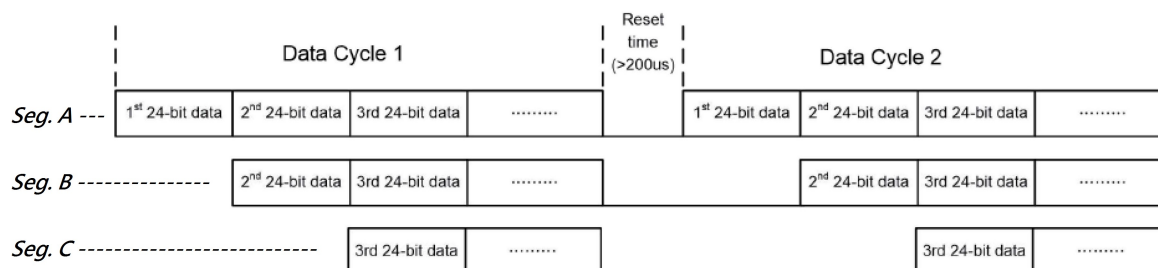


The single wire data transfer protocol supports 24-bit data for each LED RGB display data refresh.

The IC receives 24-bit data and passes the remaining data to next LED. The 24-bit data consist of green, red and blue data, each with 8-bit width, and are transferred with MSB first.




The transferred data are recognized based on the pulse widths received by the IC. A low bit 0 is represented by a 0.3us high pulse followed by a 0.9us low pulse. A high bit 1 is represented by a 0.9us high pulse followed by a 0.3us low pulse. A low pulse $\geq 200\mu s$ is used to issue a reset command to the IC to start a new cycle of serial commands.


Sequence Chart



(T_{0H}:0.3us+0.15us, T_{0L}:0.9us+0.15us)
 (T_{1H}:0.9us+0.15us, T_{1L}:0.3us+0.15us)

As an example of sleep/wake-up commands shown below.

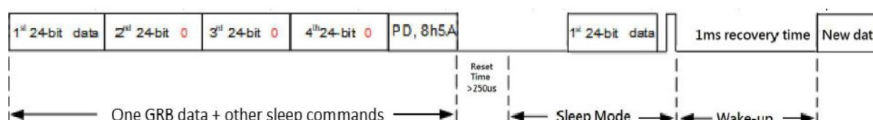



www.opledtw.com


Opto Plus LED Corp.

0.56" SMD Type LED Display

OPS-S56AAF5

Sample CODE

```
// Please write using Arduino IDE.
// Make sure that the Adafruit_NeoPixel library has been installed.
#include <Adafruit_NeoPixel.h>
#define LED_PIN 6 // Which pin on the Arduino is connected to the NeoPixels?
#define LED_COUNT 8 // How many NeoPixels are attached to the Arduino?
// Declare our NeoPixel strip object:
Adafruit_NeoPixel strip(LED_COUNT, LED_PIN, NEO_GRB + NEO_KHZ800);
void setup() {
  strip.begin();// INITIALIZE NeoPixel strip object (REQUIRED)
  strip.show();
  //strip.setBrightness(255); // Set BRIGHTNESS to about 1/5 (max = 255)
}
void loop() {
  strip.setBrightness(255);// Set BRIGHTNESS to about 5/5 (max = 255)
  strip.setPixelColor(0, 255, 255, 255); // Segment A //Turn on White.
  strip.setPixelColor(1, 255, 255, 255); // Segment B //Turn on White.
  strip.setPixelColor(2, 255, 255, 255); // Segment C //Turn on White.
  strip.setPixelColor(3, 255, 255, 255); // Segment D //Turn on White.
  strip.setPixelColor(4, 255, 255, 255); // Segment E //Turn on White.
  strip.setPixelColor(5, 255, 255, 255); // Segment F //Turn on White.
  strip.setPixelColor(6, 0, 0, 0); // Segment G //Turn off White.
  strip.setPixelColor(7, 0, 0, 0); // Segment DP //Turn off White.
  strip.show();
  delay(250);
  strip.setPixelColor(0, 0, 0, 0); // Segment A //Turn off White.
  strip.setPixelColor(1, 255, 127, 0); // Segment B //Turn on Yellow.
  strip.setPixelColor(2, 255, 127, 0); // Segment C //Turn on Yellow.
  strip.setPixelColor(3, 0, 0, 0); // Segment D //Turn off White.
  strip.setPixelColor(4, 0, 0, 0); // Segment E //Turn off White.
  strip.setPixelColor(5, 0, 0, 0); // Segment F //Turn off White.
  strip.setPixelColor(6, 0, 0, 0); // Segment G //Turn off White.
  strip.setPixelColor(7, 0, 0, 0); // Segment DP //Turn off White.
  strip.show();
  delay(250);
  strip.setBrightness(0);// Set BRIGHTNESS to about 1/5 (max = 255)
  strip.show();
  delay(250);
}
```




www.opledtw.com

Opto Plus LED Corp. 0.56" SMD Type LED Display OPS-S56AAF5

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

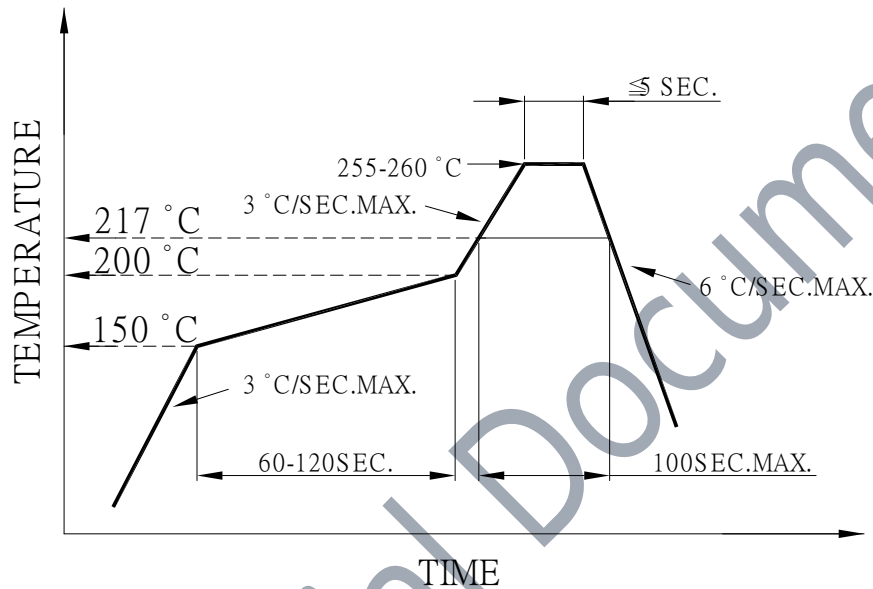

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller Than 15W, and temperature should be controllable. Surface temperature Of the device should be under 230°C.

● REWORK


- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.

Opto Plus LED Corp.


0.56" SMD Type LED Display

OPS-S56AAF5

● REEL DIMENSIONS

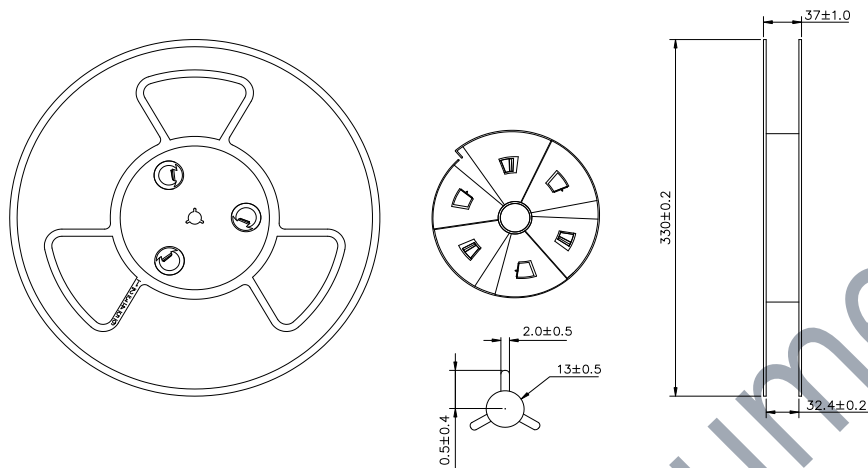

● PACKING & LABEL SPECIFICATIONS

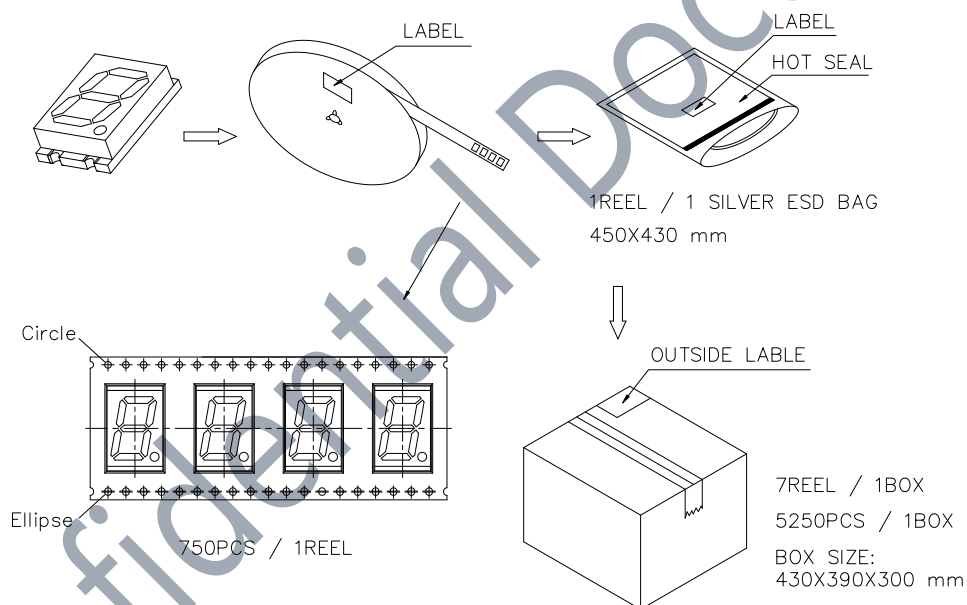

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)