


PRODUCT SPECIFICATION

Part Number	SWS065			Rev	A		Date	21/01/26
Product Description	Slide Switch, Vertical, 2.0mm Travel, Through Hole, SPDT, H=4.7mm						Page	1
Doc Number	SWS065	Prepared	KY	Checked	YR	Approved	PH	



Features:

- Profile Height: 4.7mm
- Actuator Length: 3.0mm
- Product Orientation: Vertical
- Lead Type: Through Hole

Specification:

Material

- Actuator: PA66, Black, UL94 HB
- Base Plate: Phenolic Resin, Natural
- Terminal: Brass
- Contact: Phosphor Bronze
- Shell: Stainless Steel
- Spring Plate: Stainless Steel

Plating

- Terminal: Silver
- Contact: Silver
- Shell: Nickel
- Spring Plate: Clear

Electrical

- Voltage Rating: 50V DC
- Current Rating: 0.5A
- Contact Resistance: 100mΩ Max.
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: 100MΩ Min.

Mechanical & Environmental

- Operating Temperature: -25°C to +85°C
- Operating Force: 250±100gf
- Travel: 2.0±0.3mm
- Durability: 10,000 cycles

Ordering Grid:

SWS065

030

V

12

T

S

K

Request Samples and Quotation

Actuator Length
030 = 3.0mm

Product Orientation
V = Vertical

Switch Circuit
12 = 1 Pole, 2 Throw (SPDT)

Packing Options
K = Bag
(1000pcs per bag)

Contact Plating
S = Silver


Lead Type
T = Through Hole

PRODUCT SPECIFICATION

Part Number	SWS065			Rev	A		Date	21/01/26
Product Description	Slide Switch, Vertical, 2.0mm Travel, Through Hole, SPDT, H=4.7mm						Page	2
Doc Number	SWS065	Prepared	KY	Checked	YR	Approved	PH	

Precautions for Operating:

1. Apply operating force within the range of rated value.
2. Do not apply excessive operating force to the switch.
3. Apply operating load from the side of the actuator.
4. Do not apply a load from an angle or from above the actuator.
5. Ensure the actuator is set fully to either ON or OFF position when soldering.

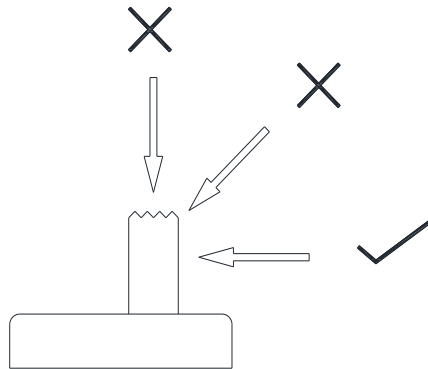

Recommended Operating Conditions

Precautions for Handling and Storage:

1. Products are vacuum sealed in plastic bag with desiccant.
2. Recommended storage conditions: -20 to +50°C, 20% to 85% humidity.
3. Avoid exposure to corrosive gases or direct sunlight.
4. After the packaging is opened, use the products as quickly as possible.
5. Products that have not been used up must be sealed in plastic bag with desiccant.

PRODUCT SPECIFICATION

Part Number	SWS065			Rev	A		Date	21/01/26
Product Description	Slide Switch, Vertical, 2.0mm Travel, Through Hole, SPDT, H=4.7mm						Page	3
Doc Number	SWS065	Prepared	KY	Checked	YR	Approved	PH	

Revision details:

Revision	Information	Page	Release Date
0.1	First draft	-	29/09/2025
A	First Release	-	21/01/2026