

Product data sheet

Specifications



Rotating beacon, Harmony XVR, 130mm, orange, without buzzer, 120V AC

XVR13G05L

Main

Range of product	Harmony XVR
Product or component type	Prewired rotating mirror beacon
Sound signalling	Without
Device short name	XVR
Mounting diameter	5.1 in (130 mm)
IP degree of protection	IP66 IEC 60529 IP67 IEC 60529
[Us] rated supply voltage	120 V AC
Light source	High luminosity LED, orange

Complementary

Material	ABS (acrylonitrile butadiene-styrene): body part PC: globe
CAD overall width	5.1 in (130 mm)
CAD overall depth	5.1 in (130 mm)
Net weight	2.18 lb(US) (0.99 kg)
Marking	CE
Product mounting	By 3 M6 screws
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	42 mA
Flashing frequency	2.7 Hz
Clamping connection capacity	1.25 mm²
AWG gauge	AWG 18
Cable length	15.7 in (400 mm)

Environment

Standards	IEC 60947-1 IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	-22...122 °F (-30...50 °C)
Electrical shock protection class	Class II IEC 61140

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	11.024 in (28.000 cm)
Package 1 Width	7.874 in (20.000 cm)
Package 1 Length	7.480 in (19.000 cm)
Package 1 Weight	2.941 lb(US) (1.334 kg)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	15.748 in (40.000 cm)
Package 2 Length	23.622 in (60.000 cm)
Package 2 Weight	20.305 lb(US) (9.210 kg)

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	93
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration


Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No

Dimensions Drawings

Rotating Mirror Beacon


Dimensions

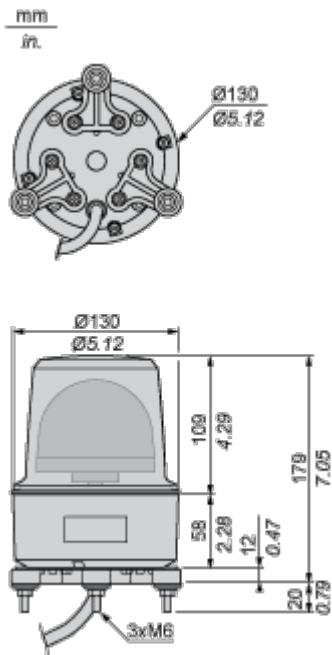

Mounting and Clearance

Rotating Mirror Beacon

Panel Cut-out

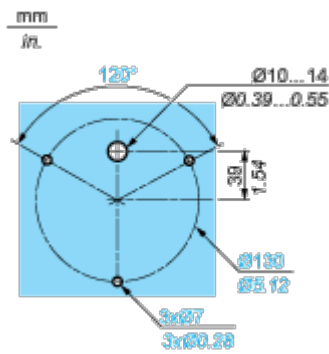

Technical Illustration

Dimensions

