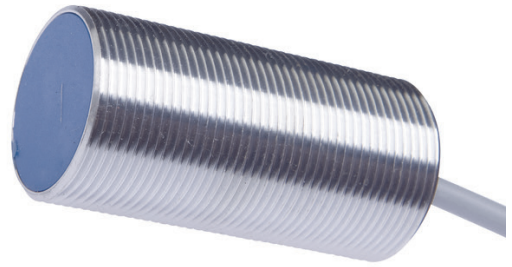


IB300006**INDUCTIVE SENSORS • DISTANCE MEASUREMENT**

sensor inductive, analog, M30x1.5 60long, Non-flush, Sn: 0-20, 15-30V DC, 0-10V/4-20mA, Cable 2m PVC, IP67, Brass Chrome-plated

**MECHANICAL FEATURES**

Active area material of sensor	PBTP
Ambient temperature	-25 °C ... 70 °C
Atmospheric-change resistant (temperature cycle)	-
Cable length	2 m
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
High-pressure-proof sensors	-
Housing coating	Chrome-plated
Housing material	Brass
Increased ambient temperatures > 80°C	-
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Non-flush
Number of cores	3
Sensor length	60 mm
Thread pitch	1.5 mm
Thread size, metric	30

ELECTRICAL FEATURES

Distance measuring sensors	+
Load resistance (current output)	0.4 kOhm
Magnetic field resistant	-
Measuring range length	0 mm ... 20 mm
Operating voltage	15 V ... 30 V
Reverse polarity protection	-
Short-circuit protection	-
Supply voltage	15 V ... 30 V
Type of analog output	0 V ... 10 V / 4 mA ... 20 mA
Type of electrical connection	Cable
Voltage type	DC

OTHER FEATURES

Devices for hose mounting	-
Feeding technology	-

OTHER FEATURES

Harsh environmental conditions	-
Hygienic and wet area	-
Metallic sensor surface	-
Oil and cooling lubricants	-
Ring-shaped sensors	-
Welding-proof sensors	-


Other

Packaging dimensions	124.0mm x 35.0mm x 149.0mm
Shipping weight	0.25kg
Tariff code	85365019


Classification

ipf product group	209
eClass 8.0	27270802
eClass 9.0	27270802
eClass 9.1	27270802
ETIM-5.0	EC001818
ETIM-6.0	EC001818
ETIM-7.0	EC001818

Connection

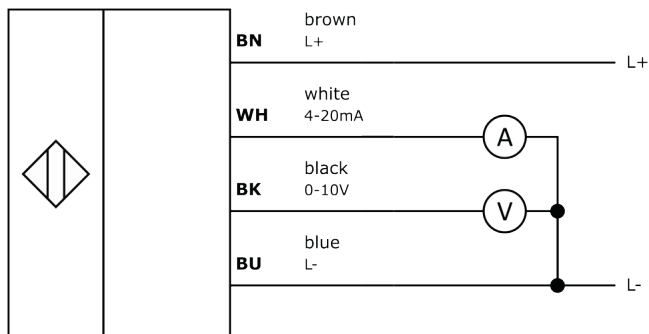

Dimensional drawing

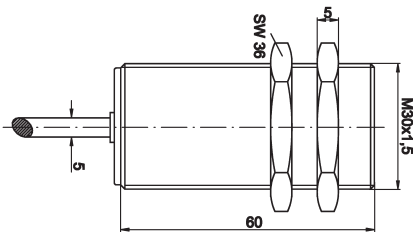

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.