
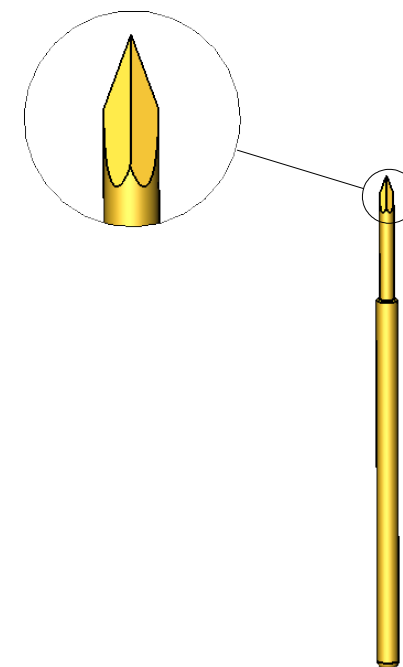


mm [inch]

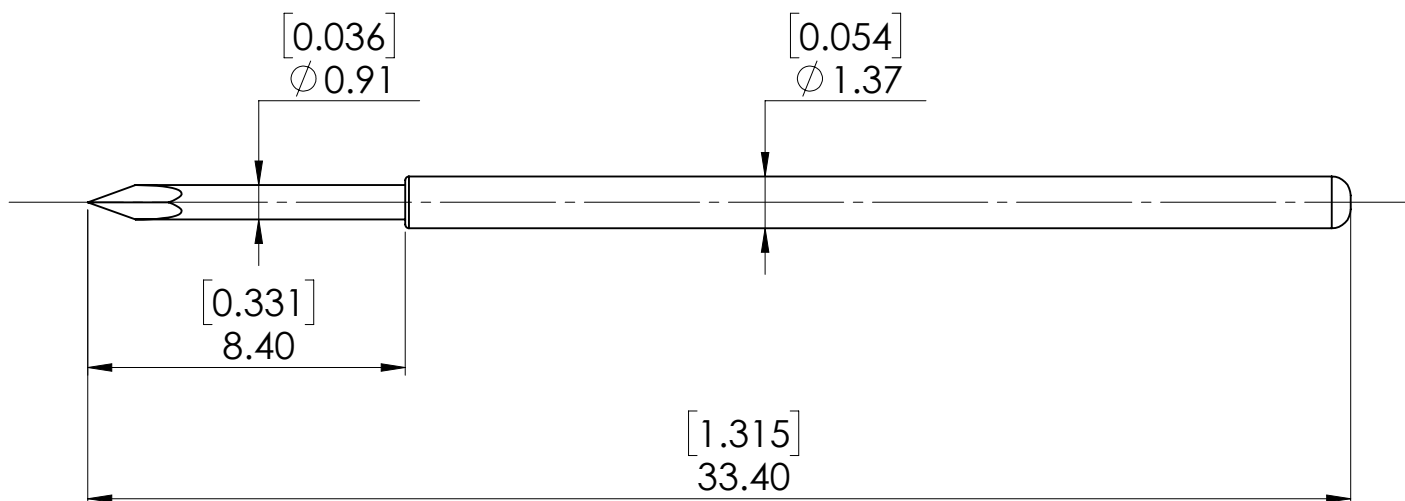

Minimum centers:	2.54 [.100]
Full travel:	6.35 [.250]
Working travel:	4.30 [.169]
Current rating:	3 - 8 A
Probe resistance:	< 20mΩ
Operating temperature:	-30°C up to +150°C
Plunger material:	Steel / Gold plated
Barrel material:	PhBr / Gold plated
Spring material:	Stainless Steel

Spring force at working stroke: 2.2 N [7.9 oz]

Technical drawing of the RCP066 WR03 fountain pen. The drawing shows the pen horizontally, with a vertical dimension line indicating the installation height. The dimension is labeled "Installation Height 16.00" with a tolerance of "[0.630]". The pen is shown in a yellow/gold color. The model name "RCP066 WR03" is written in the upper right corner.

 COPYRIGHT 2023 <i>EQUIP-TEST KFT.</i> <i>ALL RIGHTS RESERVED</i>		Name	Date	Catalog Item:		
	Designed	M.K.	2023.10.27	ST1000 LA53 NX		
	Drawn			Drawing No.:  A4 SHEET 1 OF 1 		
	Checked					
	Note					
This drawing, model, intellectual product belongs to Equip-Test Kft. Forwarding it to 3rd. party, copying it or using for any other purpose without the written approval of Equip-Test Kft., could entail to legal and criminal procedure!						